



ARTES 500 ■



The compact, multi-functional relay test system

ARTES 500 is the compact and universal solution for testing protection relays. Its built-in control panel, light weight and low noise level make this robust test system equally suitable for use on site and in the lab.

ARTES 500 makes light work of highly complex test tasks. 4 voltage and 6 current outputs allow 3-phase tests on static and digital relays. Even 3-phase tests on differential protection relays can be carried out without additional equipment.

KoCoS
A FRIEND OF ENERGY

www.kocos.com

COMPACT, PRECISE AND VERSATILE

High-accuracy amplifier and measuring units

With high-accuracy amplifiers, a wide range of measurement inputs and, last but not least, simple handling and operation, ARTES 500 is the ideal solution for professional 3-phase relay testing.

All amplifier outputs can be set separately and independently of one another as regards phase, amplitude and frequency and are equipped with overload and short-circuit protection.





The current amplifiers provide a maximum test current of 6 x 20 A. By operating the current outputs in parallel, up to 3 x 40 A can be output for 3-phase applications and up to 1 x 60 A for single-phase applications.

Operation in an upright position

All connections and interfaces are located on the front panel. This means that ARTES 500 can be operated in an upright position if there is not enough space or if no table is available.

LEDs for status indication

LEDs on the front panel indicate the states and operating modes of the inputs and outputs. The user can tell at a glance which outputs are active and can easily identify the states of the binary inputs and outputs.

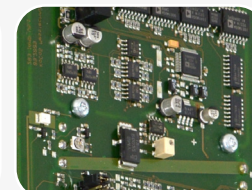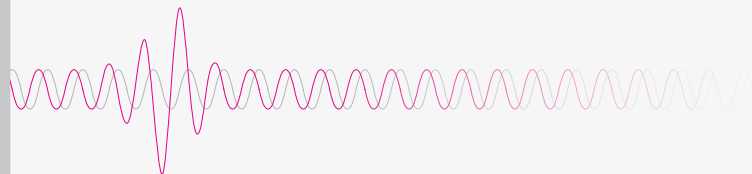

ERGONOMIC, SIMPLE AND FAST

Integrated TJCP operator interface

The internal TJCP operator interface is a special feature. Its high-resolution 5" touch screen with smart touch technology enables many tests to be carried out quickly and easily without having to connect an external PC. The clear user interface guides the user intuitively through to complete the task in hand.

User actions carried out with the ergonomic jog wheel, such as amplitude, phase angle or frequency adjustments, are processed in real time and executed without delay. An illuminated ring integrated in the jog wheel and additional acoustic signals indicate system status during settings and tests.

Applications

- Automatic testing for all types of protection relays
- Testing IEC 61850-compliant protection equipment
- "Playing back" fault records

Sources

- 4 voltage channels up to 300 V
- 6 current channel up to 6 x 20 A, 3 x 40 A or 1 x 60 A
- 10 high-accuracy low-level signal outputs
- Separate DC output

Ergonomic & compact design

- Lightweight and quiet
- All connections and controls are located on the front panel
- Can be operated in an upright position

Easy handling

- Intuitive operation via 5" touchscreen
- ARTES PC software for complex testing tasks
- Wide range of communication interfaces
- Signalling of all statuses via LEDs

Flexible powering

- Operation with AC or DC power supply
- Can be used in any country
- Immune to disturbances in the power supply

ARTES testing software

As a rule, all test tasks can be carried out using the integrated control panel. For complex protection functions, the ARTES PC software is a tool which can significantly simplify, automate and therefore speed up tests. For this purpose, the ARTES testing software provides a wide range of practical test monitors which are all included in the scope of delivery, in addition to the basic software:

■ VD-Monitor

Test any protection function by setting the test quantities manually. In addition, the output signals can also be run as linear or staircase ramps within the configured range.

■ IT-Monitor

Check the operating times and directional sensitivity of overcurrent relays

■ IMP-Monitor

Check the operating times and impedance zones of distance protection devices

■ DIFF-Monitor

Check the tripping characteristic and operating times of differential protection relays

■ QU-Monitor

Check the QU protection function

■ SYNC-Monitor

Test paralleling devices and synchronizers

■ PIC-Monitor

Check the pick-up and drop-off values of protection relays

■ TD-Monitor

Determine measuring transducer error

■ SmartSequencer

Event-controlled output of test sequences

■ TRANSIG-Monitor

Display and output COMTRADE records and generate any signal characteristic

TECHNICAL DATA

Sources	4 voltage and 6 current outputs
Frequency range	DC...3 kHz
Transient signals	DC...4 kHz
Phase angle	0...360°
Voltage outputs	
4-phase (L-N)	4 x 0...300 V / 75 VA
1-phase (L-L)	1 x 0...600 V / 150 VA
Current outputs	
6-phase	6 x 0...20 A / 50 VA
3-phase	3 x 0...40 A / 100 VA
1-phase	1 x 0...60 A / 100 VA
Low-level signal outputs	10 separately and independently adjustable outputs, output range 0...10 V _{pk}
DC output	12...260 VDC, 50 W, max. 2 A
Binary inputs	
Quantity	8 inputs
Groups	2 galvanically isolated groups with 4 inputs each Each group is configurable for measuring dry / wet contacts
Binary outputs	2 potential-free, galvanically isolated relays
Operation	
PC	ARTES testing software for Windows® 7 / 8 / 10 / 11
Stand-alone	5" touch screen, 3 function keys, jog wheel
Measurement connections	All the connections are located on the front panel. This means that ARTES 500 can also be operated in an upright position.
Interfaces	USB, Ethernet
Time synchronization	Internal GPS receiver
Status LEDs	Indication of active current and voltage outputs and of the status of the binary inputs and outputs by LEDs
Supply voltage	100...265 VAC, 47...63 Hz / 120...265 VDC
Housing	
Dimensions (mm)	19" housing, 3 U, handle serves as stand 470 x 162 x 326 (W x H x D)
Weight	13,5 kg

KoCoS Messtechnik AG

Südring 42

34497 Korbach, Germany

Tel. +49 5631 9596-40

info@kocos.com

www.kocos.com

KoCoS
A FRIEND OF ENERGY

[ENG]

Technical specifications subject to change without prior notice | 202505 | © KoCoS Messtechnik AG

